

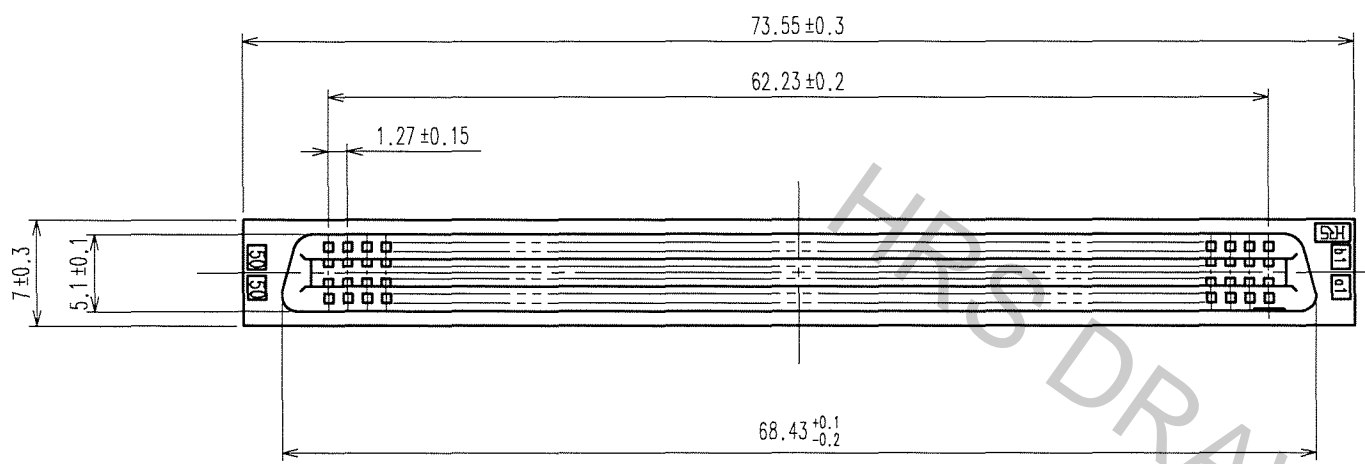
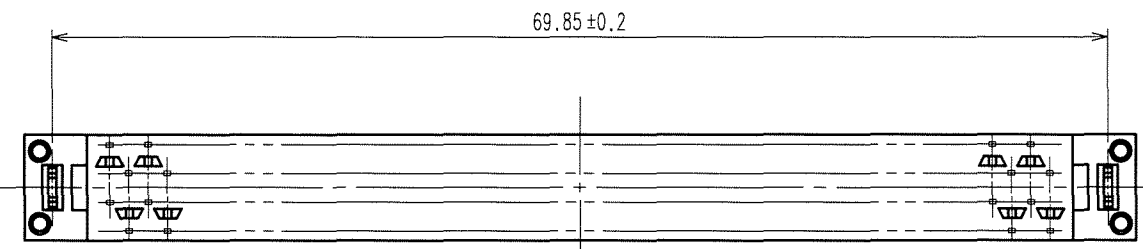
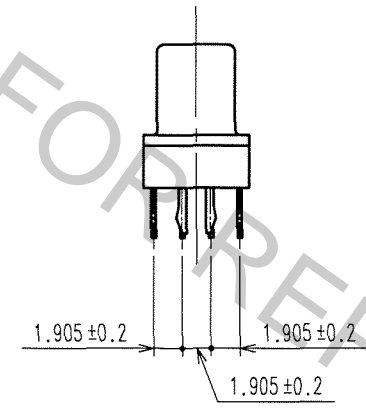


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

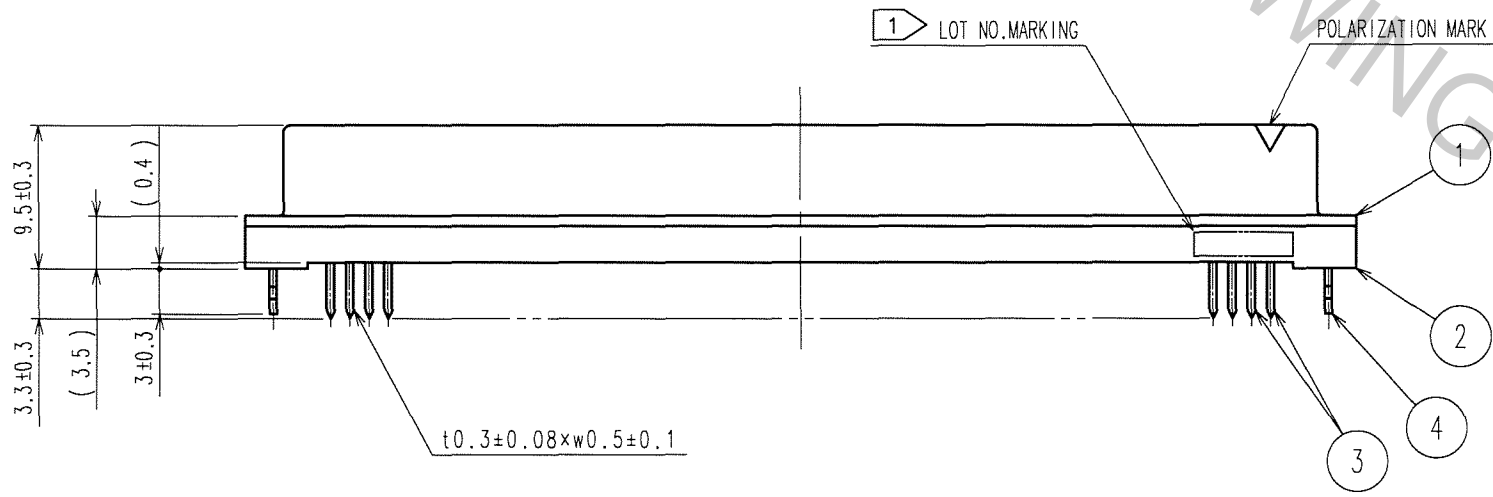

RECOMMENDED PC BOARD HOLE PATTERN(MOUNTING SIDE)
 (FREE) t=1.6

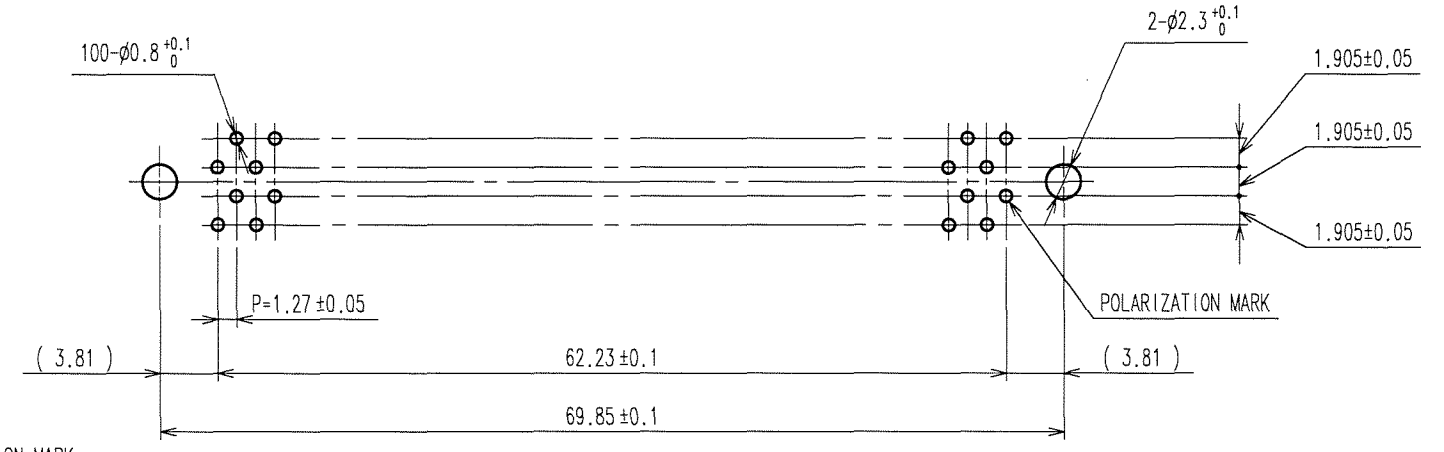

NOTES 1 LOT NO. MARKING SIDE SHALL BE OPTIONAL.
 2. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

4	PHOSPHOR BRONZE	TIN-PLATING	3	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.2μ m min.
1,2	POLYAMIDE	BLACK,UL94V-0			DIP AREA : TIN-PLATING 2μ m min.
					UNDER PLATING : NICKEL 2μ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN S.KAMIGA '06.10.03	DESIGNED <i>R. Nakamura</i> '06.10.03	CHECKED <i>H. Ozawa</i> '06.10.04	APPROVED <i>H. Okawa</i> '06.10.04	RELEASED ..
----------------------	--------------------------------	---	---	--	----------------

SCALE 2 : 1	DRAWING NO. EDC3-083194-21	PART NO. FX2C-100S-1.27DSAL(71)
UNITS mm	HRS HIROSE ELECTRIC CO., LTD	CODE NO. CL572-2458-4-71

TO
PCK

1/1