



A	PLUG COMPONENT			PLUG STRIP DIMENSION			SVT 18AWGx3C 105°C Shielded Black Length 2010±50	END STRIP DIMENSION			TERMINAL COMPONENT		A
	COLOR	DESCRIPTION	Q'ty	R.I.J	R.O.J	COLOR		R.O.J	R.I.J	COLOR	DESCRIPTION	TYPE	
	40P BLACK	PVC Compound	1	6 ⁺¹ ₋₀	19 ± 1	BLACK(L)	15 ⁺³ ₋₀		BLACK(L)				
	Gray color	Assembly Body 111-003-001	1	6 ⁺¹ ₋₀	19 ± 1	WHITE(N)	15 ⁺³ ₋₀		WHITE(N)				
				6 ⁺¹ ₋₀	19 ± 1	GREEN(E)	15 ⁺³ ₋₀		GREEN(E)				

B

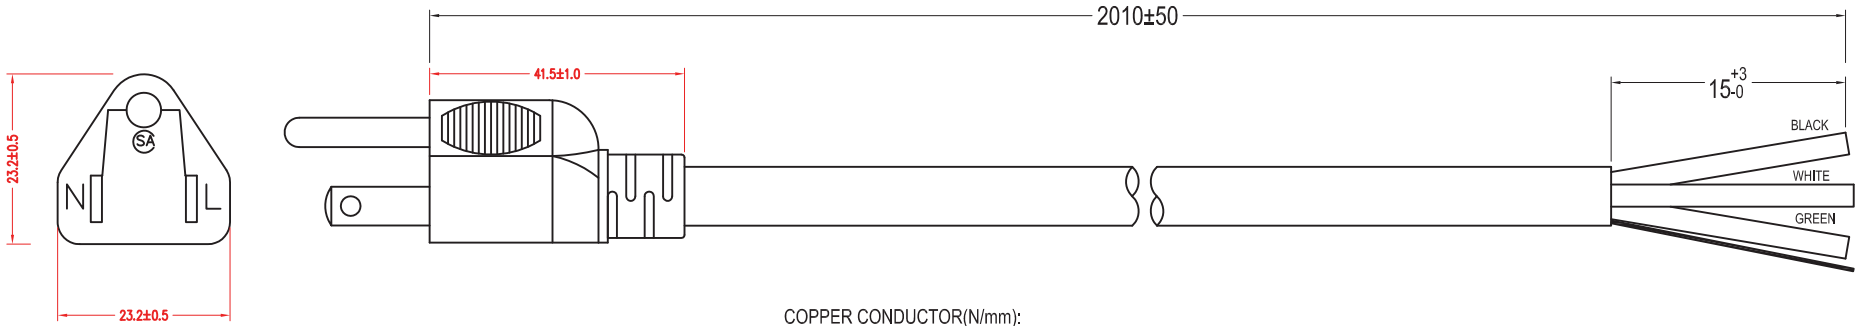

C

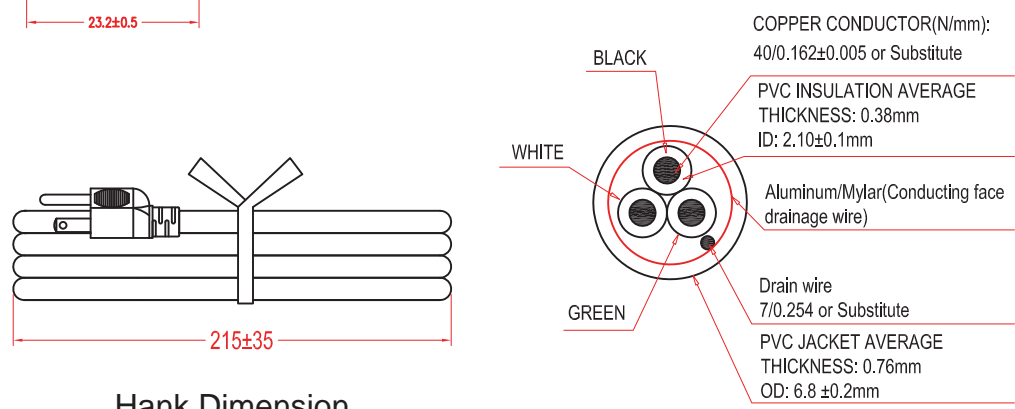


- Material:**
- SVT 3x18AWG(0.824mm²) VW-1 Shielded, 105° 300V
 - Jacket color: Black
 - E - Green; L- Black; N - White
- Electrical:**
- 100% Open & short testing.
 - Insulation Resistance: 100MΩ (min.)
 - Voltage: 500V DC / 1 minute

E

F

Wire Cross Section



Scale	Free						Date	Name	Title Power cord - SVT / Open End Shielded 105°C, 18 AWG, 2 Meters
TOLERANCE						Drawn	22.04.16	Wilson	
X.	±0.3					Approved	22.04.16	Groll	ASSMANN WSW-No. AK500-OE-7-2
X.X	±X								Drawing-No.
X.XX	±X								rev00
DIM	TOL								
X.°	±X°								Sheet 1/1
X.X°	±X°								
Angle	TOL	Id.	Modification	Date	Name	 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us			

G

H